



Retail

Healthcare &
PharmacyPost &
ParcelWarehouse &
Storage
Handling

FIRST REAL WATERPROOF

3 inch Thermal POS Printer
SRP-F310



HIGHLIGHTS



Water
ventilation



Dual layers for
water protection

Liquid-Barrier™ front exit printer

The SRP-F310 is a front exit type receipt POS printer adapting structure for preventing liquid infiltration and certified under the electrical protection level, IPX2 Class. Its design components include an exterior cover as well as dual layers on both sides of the printer which discharge liquid preventing it from infiltrating inside. In addition, it is designed with an outlet at the bottom of the printer for liquid that may seep inside through the cover open button.




BIXOLON®
a Better Solution for your Business™

SRP-F310

FEATURES

All in one plus™ interfaces


The SRP-F310 features a powerful interface that goes beyond your imagination of what you are looking for in a receipt POS printer. It includes USB 2.0 On board for fast data transfer and USB host port for the use of WLAN dongle* and Ethernet, which is sold separately at a high price. The four interfaces are provided as a built-in feature. Selectable Interfaces are Serial and Parallel.

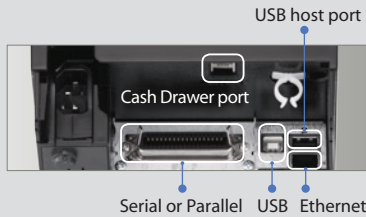

* WLAN dongle : The SRP-F310 is compatible with WLAN adapters using the Ralink RT73 chipset. WLAN USB adapters using chipsets other than Ralink RT73 won't work when they are connected to the SRP-F310 .


Built-in power supply

The power adapter is elegantly integrated into the compact printer housing. Consequently, messing around with cables is avoided which is ideal at space-limited POS terminals or highly frequented cash desks.

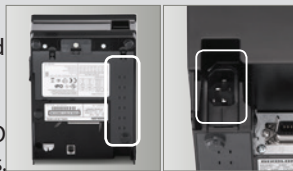

Optional BIXOLON Interactive Linker

BIXOLON Interactive Linker is an advanced printer option that allows users to add commands to four customizable buttons. For instance, they can assign such BIXOLON Interactive Linker based programs as "Receipt on Demand", "Cash Drawer Open", "Printing Stop" and "Signal Back to Host" to each button to accommodate their needs.

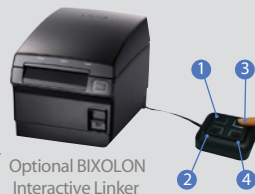

Ergonomic design & High glossy option

BIXOLON SRP-F310 is designed in a pentagon shape with separate angles for the control panel unlike existing front exit type receipt POS printers. This ergonomic design allows users to check the printer status more conveniently and eliminates the need to open a drawer to check the status for those who keep the printer in a drawer. High glossy option is also available and it fits modernly in a place that adapted Tablet PC as their point of sale or order taking solutions.



SPECIFICATIONS

Printer Specifications

Print Method: Direct Thermal (Front Exit)
Print Speed: 270 mm/sec
Print Resolution: SRP-F310: 180 dpi / SRP-F312: 203 dpi
Print Width: SRP-F310: Up to 72 mm / SRP-F312: Up to 80 mm
Sensor: Paper End, Paper Near End, Cover Open

Media Characteristics

Media Type: Receipt
Media Width: 80 / 83 mm
Media Roll (Diameter): Up to 105 mm
Media Thickness: 0.062 ~ 0.075 mm
Supply Method: Easy Paper Loading

Physical Characteristics

Dimensions (WxLxH): 154 x 203 x 148 mm (6.06 x 7.99 x 5.82 inch)
Weight: 2.00 kg (4.40 lbs.)
Power: EnergyStar Certified, External Power Adaptor 100-240V AC, 50/60Hz
Drawer Port: 2 ports (via y-type adaptor)

Performance Characteristics

Memory: 512 Mbits SDRAM, 128 Mbit FlashROM
NV Image Memory: 256 Kbytes (mono) / 256 Kbytes (color)
Receive Buffer: 512 Kbytes
User Define Buffer: 12 Kbytes
Interface: Quad Interface
USB V2.0 HS + Serial + Ethernet + WLAN*
USB V2.0 HS + Parallel + Ethernet + WLAN*
* WLAN: 802.11b/g/n USB dongle type (optional)

Environment Characteristics

Temperature: Operating: 0~45 (32~113 °F) / Storage: -20~60 (-4~140 °F)
Humidity: Operating: 10~80% RH / Storage 10~90% RH

Reliability

Printer Unit (MCBF): 70 Million Lines
TPH: 150 km
Auto Cutter: 1.8 Million Cuts

Software

Emulation: BXL / POS
Driver / Utility: Windows Driver, OPOS Driver, JPOS Driver, Linux CUPS Driver, Mac Driver, Virtual COM USB / Ethernet Driver, Utility Program
SDK: iOS SDK, Android SDK

Fonts / Graphics / Symbolologies

Character Size: Font A: 12x24 Font B: 9x17 Font C: 9x24 / KOR, CHN, JPN: 24x24
Characters Per Line: SRP-F310: Font A: 42 Font B, C: 56 / KOR, CHN, JPN: 21
SRP-F312: Font A: 48 Font B, C: 64 / KOR, CHN, JPN: 24
Character Sets: Alphanumeric: 95 / Extended Graphics: 12834 page / International: 32
Graphics: Supporting user-defined fonts, graphics, formats, and logos
Barcode Symbolologies: 1D: Coda Bar, Code39, Code93, Code128, EAN-8, EAN-13, ITF, UPC-A, UPC-E
2D: PDF417, QR Code

BR-SR-F310-EN-MAR14

Copyright © BIXOLON Co., Ltd. All rights reserved.
Features and specifications are subject to change without prior notice.

BIXOLON®

www.bixolon.com



BIXOLON Co., Ltd.
7~8F, (Sampyeong-dong), 20, Pangyo-eok-ro 241 beon-gil,
Bundang-gu, Seongnam-si, Gyeonggi-do, 463-400, Korea (ROK)
Tel +82 (0) 31 218 5500
Fax +82 (0) 31 218 5589
E-mail sales@bixolon.com

BIXOLON America Inc.
3171 Fujita St Torrance,
CA 90505, USA
Tel +1 858 764 4580
Fax +1 310 257 6869
E-mail sales@bixolonusa.com

BIXOLON Europe GmbH
Tiefenbroicher Weg 35,
40472 Düsseldorf, Germany
Tel +49 211 68 78 54 0
Fax +49 211 68 78 54 20
E-mail sales@bixolon.de